

DEVICE SPECIFICATIONS

NI 2815

0.3 A Matrix Card for NI SwitchBlock

This document lists specifications for the NI 2815A/B matrix relay card. All specifications are subject to change without notice. Visit ni.com/manuals for the most current specifications. Refer to the [NI Switches Help](#) for detailed topology information.

Topology..... 1-wire 4×86 matrix

Contents

About These Specifications.....	1
Cautions.....	2
Input Characteristics.....	3
Peak Switching Voltage Versus Current.....	4
Dynamic Characteristics.....	4
Power.....	5
Physical Characteristics.....	5
Connector Pinout.....	7
Accessories.....	7
Environment.....	8
Operating Environment.....	8
Storage Environment.....	8
Compliance and Certifications.....	9
Safety.....	9
Electromagnetic Compatibility.....	9
CE Compliance.....	9
Online Product Certification.....	10
Environmental Management.....	10

About These Specifications

Specifications characterize the warranted performance of the instrument under the stated operating conditions.

Typical Specifications are specifications met by the majority of the instrument under the stated operating conditions and are tested at 23 °C ambient temperature. Typical specifications are not warranted.

All voltages are specified in DC, AC_{pk}, or a combination unless otherwise specified.

Clean devices and terminal blocks by brushing off light dust with a soft, nonmetallic brush. Remove other contaminants with a soft, lint-free, dampened cloth. Do not use detergent or chemical solvents. The unit must be completely dry and free from contaminants before returning to service.

Cautions



Caution This module is rated for Measurement Category I and intended to carry signal voltages no greater than $70 V_{\text{rms}}/100 V_{\text{pk}}/100 \text{ VDC}$. This module can withstand up to 500 V impulse voltage. Do not use this module for connection to signals or for measurements within Categories II, III, or IV. Do not connect to MAINS supply circuits (for example, wall outlets) of 115 VAC or 230 VAC. Refer to the *Read Me First: Safety and Electromagnetic Compatibility* document for more information on measurement categories.



Caution Measurement Categories CAT I and CAT O are equivalent. These test and measurement circuits are not intended for direct connection to the MAINS building installations of Measurement Categories CAT II, CAT III, or CAT IV.



Caution In systems that include cards with different maximum voltages, the lowest safety voltage rating as specified on the front of the card applies for the entire system. The system can include all cards in the carrier, and all cards in other carriers that are connected with the NI 2806 expansion bridge.



Caution When hazardous voltages ($>42.4 V_{\text{pk}}/60 \text{ VDC}$) are present on any channel, safety low-voltage ($\leq 42.4 V_{\text{pk}}/60 \text{ VDC}$) cannot be connected to any other channel.



Caution Refer to the *Read Me First: Safety and Electromagnetic Compatibility* document for important safety and electromagnetic compatibility information. To obtain a copy of this document online, visit ni.com/manuals, and search for the document title.



Caution To ensure the specified EMC performance, operate this product only with shielded cables and accessories.



Caution The protection provided by the NI 2815A/B can be impaired if it is used in a manner not described in this document.



Caution Always disconnect or turn off power sources before powering on a chassis.

Input Characteristics

Maximum switching voltage

Row/column-to-ground.....	100 V, CAT I
Row-to-column.....	100 VDC/70 VAC

Maximum switching current.....0.25 A (per channel)

Maximum carry current.....0.3 A (per channel)

Maximum switching power

Per channel.....	3 W
Per crosspoint.....	3 W

DC path resistance

Initial.....	<1 Ω
End-of-life.....	$\geq 2 \Omega$
Open channel.....	$>1 \times 10^9 \Omega$



Note DC path resistance typically remains low for the life of the relay. At the end of relay life, the path resistance rises rapidly above the specified value. Load ratings apply to relays used within the specification before the end of relay life.

Thermal EMF, typical.....<50 μV

Bandwidth, typical (-3 dB, 50 Ω $\geq 6 \text{ MHz}$
termination, column-row-column)

Crosstalk, typical (50 Ω termination) channel-
to-channel

10 kHz.....	<-60 dB
100 kHz.....	<-50 dB
1 MHz.....	<-30 dB

Isolation, typical (50 Ω termination) open
channel

10 kHz.....	>65 dB
100 kHz.....	>50 dB
1 MHz.....	>30 dB

Analog bus line connections.....AB <0...3> (4 Lines)


Related Information

[Peak Switching Voltage Versus Current](#) on page 4

Peak Switching Voltage Versus Current

The following figure shows the peak switching voltage in relation to the peak switching current.

Figure 1. Peak Switching Voltage Versus Current

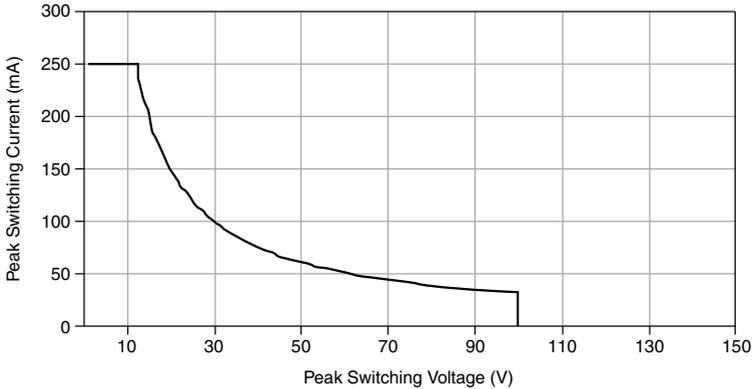

Dynamic Characteristics

Simultaneous drive limit¹.....61 relays

Relay operate/release time
(simultaneous relays), typical²

Up to 8 relays.....<1 ms

Up to 50 relays.....<2 ms

Expected relay life, mechanical..... 2.5×10^8 cycles
(no load)

¹ The overall carrier drive limit prevents simultaneous drive of relays under the card limit on some cards in some configurations. Refer to the *NI 2800 Specifications* for information about carrier drive limit.

² Relay operate and release times depend on PC and PXI bus performance and application software. For more information about NI SwitchBlock relay operate times, visit ni.com/info and enter the Info Code `exa9ee`.

Expected relay life, electrical
(resistive, <10 pF load)

5 V, 10 mA.....	1×10^9 cycles
10 V, 100 mA.....	4×10^6 cycles
100 V, 10 mA.....	5×10^5 cycles



Note Optional 100 Ω series protection resistance, available for the interface cable, increases the expected relay life at higher voltages by protecting the reed relays from the effects of cable and load capacitance. For more information about increasing the life of your relay, visit ni.com/info and enter the Info Code `relaylifetime`.



Note Reed relays are highly susceptible to damage caused by switching capacitive and inductive loads. Capacitive loads can cause high inrush currents, and inductive loads can cause high flyback voltages. The addition of appropriate protection can greatly improve contact lifetime. For more information about adding protection circuitry to a capacitive load, visit ni.com/info and enter the Info Code `relaylifetime`. For information about inductive loads, enter the Info Code `relayflyback`.

Related Information

Certain applications may require additional time for proper settling. Refer to the NI Switches Help for information about including additional settling time.

Relays are field replaceable. Refer to the NI Switches Help for information about replacing failed relays.

Power

Power consumption per relay.....	63 mW
Power consumption limit ³	3.9 W
Power dissipation limit	
Card.....	3.9 W
Carrier.....	3.9 W

Physical Characteristics


Relay type.....	Reed
Relay contact material.....	Ruthenium

³ For more information about NI SwitchBlock power limits, visit ni.com/info and enter the Info Code `sbpwrlim`.

I/O connectors.....	96 position, plastic SCSI
Power requirement, carrier.....	10 W at 5 V, 2 W at 3.3 V
Dimensions (L × W × H).....	11.2 cm × 1.2 cm × 17.1 cm (4.4 in. × 0.5 in. × 6.7 in.)
Weight.....	320 g (11.3 oz)

Connector Pinout

Figure 2. NI 2815A/B Connector Pinout

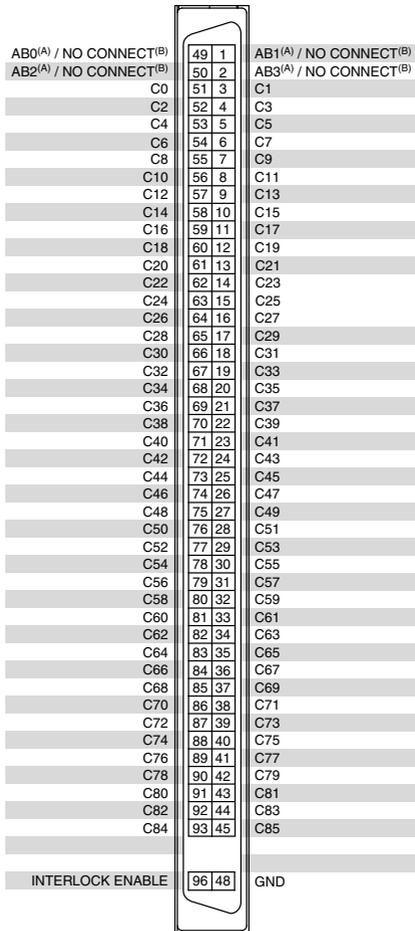

Related Information

For topology-specific connection information, refer to your device in the [NI Switches Help](#) and the installation instructions for any associated accessories or terminal blocks.

Accessories

Refer to ni.com for more information about the following accessories.



Caution Use only NI cables. Cables with metal connectors might expose the user to hazardous voltages.



Note To ensure the specified EMC performance, operate this product only with shielded cables and accessories. Do not use unshielded cables or accessories unless they are installed in a shielded enclosure with properly designed and shielded input/output ports and are connected to the NI product using a shielded cable. If unshielded cables or accessories are not properly installed and shielded, the EMC specifications for the product are no longer guaranteed.

Table 1. NI Accessories for the NI 2815A/B

Accessory	Part number
SH96F-96M-NI SwitchBlock Cable	150275-01
SH96F-96M-RES-NI SwitchBlock Cable with 100 Ω resistance	150579-01
NI TBX-2809 Screw Terminal Accessory (unshielded)	781420-09

Environment

Maximum altitude.....2,000 m (at 25 °C ambient temperature)

Pollution Degree.....2

Indoor use only.

Operating Environment

Ambient temperature range.....0 °C to 55 °C (Tested in accordance with IEC-60068-2-1 and IEC-60068-2-2.)

Relative humidity range.....10% to 90%, noncondensing (Tested in accordance with IEC-60068-2-56.)

Storage Environment

Ambient temperature range.....-20 °C to 70 °C (Tested in accordance with IEC-60068-2-1 and IEC-60068-2-2.)

Relative humidity range.....5% to 95%, noncondensing (Tested in accordance with IEC-60068-2-56.)

Operational shock.....30 g peak, half-sine, 11 ms pulse (Tested in accordance with IEC-60068-2-27. Test profile developed in accordance with MIL-PRF-28800F.)

Random vibration

Operating.....	5 Hz to 500 Hz, 0.3 g _{rms}
Nonoperating.....	5 Hz to 500 Hz, 2.4 g _{rms} (Tested in accordance with IEC-60068-2-64. Nonoperating test profile exceeds the requirements of MIL-PRF-28800F, Class 3.)

Compliance and Certifications

Safety

This product is designed to meet the requirements of the following electrical equipment safety standards for measurement, control, and laboratory use:

- IEC 61010-1, EN 61010-1
- UL 61010-1, CSA 61010-1



Note For UL and other safety certifications, refer to the product label or the [Online Product Certification](#) section.

Electromagnetic Compatibility

This product meets the requirements of the following EMC standards for electrical equipment for measurement, control, and laboratory use:

- EN 61326-1 (IEC 61326-1): Class A emissions; Basic immunity
- EN 55011 (CISPR 11): Group 1, Class A emissions
- AS/NZS CISPR 11: Group 1, Class A emissions
- FCC 47 CFR Part 15B: Class A emissions
- ICES-001: Class A emissions



Note In the United States (per FCC 47 CFR), Class A equipment is intended for use in commercial, light-industrial, and heavy-industrial locations. In Europe, Canada, Australia, and New Zealand (per CISPR 11), Class A equipment is intended for use only in heavy-industrial locations.



Note Group 1 equipment (per CISPR 11) is any industrial, scientific, or medical equipment that does not intentionally generate radio frequency energy for the treatment of material or inspection/analysis purposes.



Note For EMC declarations, certifications, and additional information, refer to the [Online Product Certification](#) section.

CE Compliance

This product meets the essential requirements of applicable European Directives, as follows:

- 2006/95/EC; Low-Voltage Directive (safety)
- 2004/108/EC; Electromagnetic Compatibility Directive (EMC)

Online Product Certification

To obtain product certifications and the DoC for this product, visit ni.com/certification, search by model number or product line, and click the appropriate link in the Certification column.

Environmental Management

NI is committed to designing and manufacturing products in an environmentally responsible manner. NI recognizes that eliminating certain hazardous substances from our products is beneficial not only to the environment but also to NI customers.

For additional environmental information, refer to the *Minimize Our Environmental Impact* web page at ni.com/environment. This page contains the environmental regulations and directives with which NI complies, as well as other environmental information not included in this document.

Waste Electrical and Electronic Equipment (WEEE)



EU Customers At the end of the product life cycle, all products must be sent to a WEEE recycling center. For more information about WEEE recycling centers, National Instruments WEEE initiatives, and compliance with WEEE Directive 2002/96/EC on Waste Electrical and Electronic Equipment, visit ni.com/environment/weee.htm.

电子信息产品污染控制管理办法（中国 RoHS）



中国客户 National Instruments 符合中国电子信息产品中限制使用某些有害物质指令 (RoHS)。关于 National Instruments 中国 RoHS 合规性信息，请登录 ni.com/environment/rohs_china。(For information about China RoHS compliance, go to ni.com/environment/rohs_china.)

Refer to the *NI Trademarks and Logo Guidelines* at ni.com/trademarks for information on National Instruments trademarks. Other product and company names mentioned herein are trademarks or trade names of their respective companies. For patents covering National Instruments products/technology, refer to the appropriate location: **Help»Patents** in your software, the `patents.txt` file on your media, or the *National Instruments Patent Notice* at ni.com/patents. You can find information about end-user license agreements (EULAs) and third-party legal notices in the readme file for your NI product. Refer to the *Export Compliance Information* at ni.com/legal/export-compliance for the National Instruments global trade compliance policy and how to obtain relevant HTS codes, ECCNs, and other import/export data.

© 2010—2014 National Instruments. All rights reserved.

375528E-01 Jan14